




Specifications:


-  (UL 2044)

Primary:

- Input 115VAC 50/60Hz, 0.9 Amps

Outputs:

- 4 Amps 100 VA supply current.
- Eight (8) 24VAC individually fused outputs.
- Output fuses are rated at 3 Amps.
- Main fuse is rated at 5 Amps.
- Surge protected outputs.
- AC power LED indicator.
- Power ON/OFF switch.
- Spare fuses included.
- Unit maintains camera synchronization
- Ease of installation saves time and eliminates costly labor

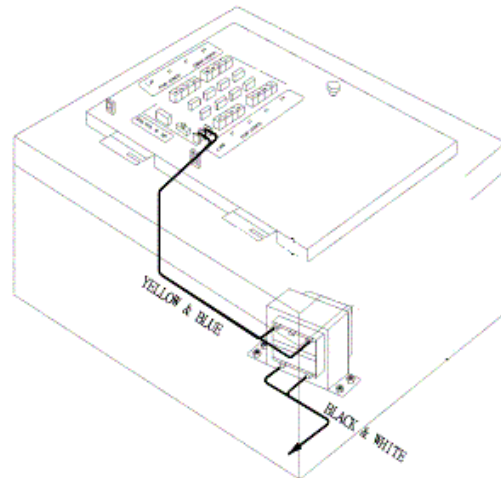

Installation Instructions:

1. Mount the REP3AC24-8-4L in desired location.
2. Slide switch to OFF position.
3. Connect green lead to earth ground. Connect the AC 115VAC 50/60Hz to the black and white leads of the transformer.
4. Connect each camera to terminal pairs 1 to 8 marked (+ & -).
NOTE: It is important to measure output voltage before connecting devices. This helps avoid potential damage.
5. Slide switch to ON position.
6. Green LED will illuminate when AC power is present.
7. Red individual LED's will light when cameras or accessories are present & powered.
8. Upon completion of wiring, secure enclosure door with catch.

WARNING:

- **To reduce the risk of fire or electric shock do not expose this unit to rain or moisture. This installation should be made by qualified service personnel and should conform to all local codes and in accordance with the National Electrical Codes. For continuous protection against hazard, replace only with same type and rating of fuse.**
- **The power cord included with this power supply is intended for temporary testing purposes only.**
- **Before testing, ensure that the enclosure has been properly grounded as per local and National Electrical Codes.**
- **This product must be installed by qualified personnel in accordance with all local and National Electrical Codes.**